


Polystrat NSE72-213 is rubber coated steel for gasket applications

NBR coated steel for gasket applications with good resistance against mineral and synthetic oils

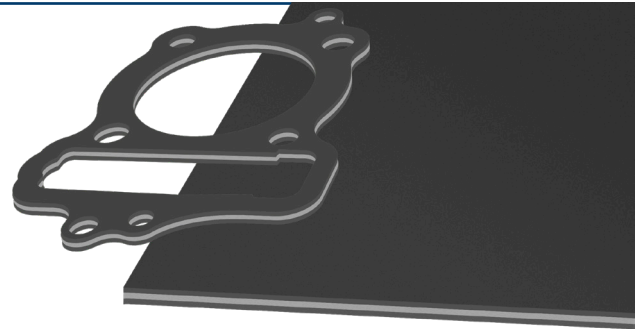

Basis composition NBR/Carbon Steel/NBR

Surface treatment Anti Stick

Color Black - Other per request

Roll ROLL LENGTH up-to 500 m

Width Up-to 500 mm or per agreement

Composite and tolerances	Rubber, NBR	0.065 ± 0.005 mm
	Stainless steel	0.250 ± 0.020 mm
	Rubber, NBR	0.065 ± 0.005 mm
	Total	0.380 ± 0.030 mm

Industry

Automotive / General Industry / Pumps / Compressors

Typical technical data and Properties for KLINGER® Polystrat

Max. creep relaxation	ASTM F38	%	12
Rubber hardness	Shore A ISO 7619-1		70-72
	IRHD ISO 48		68-70
Rubber to metal bond integrity	KLINGER Scratch test		Pass
	MEK rub test 10 min		Pass
Hot piston test	200 °C / 42 MPa / 2 min.		Pass
Ageing Properties	IRM 903 oil ISO 1817, 72 h 100°C		
	Hardness Shore A	ISO 7619-1	% -4%
	Tensile strength	ISO 37	% +7%
	Ultimate elongation	ISO 37	% -38%
	Weight	Increase	% +5,8
	Volume	Increase	% +8,6
Chemical resistance of the rubber layer	no embrittlement and delamination		
	Fuel B 72 h, RT		Pass
	FAM A 48 h, RT		Pass
	Diesel fuel 72 h, RT		Pass
	Oil IRM 903 72 h, RT		Pass
	Motor oil SAE 15W-40 24 h, 125°C		Pass
	Brake fluid DOT 4 72 h, 100°C		Pass
	Coolant Glysantin® 30 (50:50) 125 h, 125°C		Pass
Storage life (Higher storage temperature and or longer storage time may cause a quality decrease of the product)	DIN 7716	Months	24

All information is based on years of experience in production and operation of sealing elements. However, in view of the wide variety of possible installation and operating conditions one cannot draw final conclusions in all application cases regarding the behaviour in gasket joint. The data may not, therefore, be used to support any warranty claims. This edition cancels all previous issues. Subject to change without notice.

